



**Mincey Marble Mfg., Inc.**

4321 Browns Bridge Road  
Gainesville, GA 30504

Ph: 800.533.1806

Fx: 770.531.0935

[www.minceymarble.com](http://www.minceymarble.com)

**Installation Instructions for Mincey Marble Manufacturing's**

**Amenities Niche with Fan Header**

**Product number #AN-01**




**AN-01**

**Please read the following before attempting to install our cast marble Amenities Niche.**

*These instructions have been written for Mincey Marble's AN-01 Amenities Niche with fan header. If you have an AN-02 Amenities Niche without the fan header or an AN-04 Amenities Niche with coffee pot access, please call our office so we can send the proper instructions to you.*

**Front View**

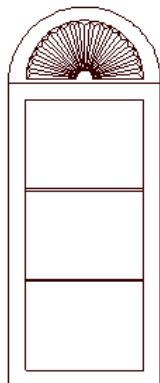

**Side View**



## **Tools /Materials Required**

1. Latex caulk for marble to drywall seams, color matched for your niche and fan header
2. Clean, dry cloths to clean Amenities Niche and wipe caulking
3. Construction adhesive for adhering Amenities Niche to the wall
4. Hot melt glue gun and glue sticks
5. 2' level
6. Pencil
7. 100% silicone color matched for your niche and fan header

***The rough opening for the Amenities Niche should be 15 1/2" wide by 33" tall. You will also need a minimum depth 12" empty space behind where the Niche will be installed in the wall. This is because, of necessity, the niche recesses into the wall.***

## **To install the Amenities Niche with Fan Header:**

1. Once the rough opening has been built, finish the substrate around the area of the opening and paint or apply wallpaper before installing the niche and fan header.
2. Dry fit the amenities niche in the rough opening, to ensure it seats properly. Use the 2' level to level the niche. Make a reference line at the top of the niche to align the niche when installing.
3. Apply construction adhesive to the back of the amenities niche and install the amenities niche. Note: you may want to use a small amount of hot melt glue to help hold the niche in place until the adhesive has time to set.
4. The fan header is installed next. It will rest on top of the amenities niche. The edges of the fan header should be flush with the edges of the niche.
5. Caulk with appropriate color latex or acrylic caulk around the edges of niche and fan header, where marble meets drywall or painted or wallpapered walls. Use 100% silicone, color matched to match the marble where the fan header meets the top of the niche.
6. After installation is complete, remove the protective film from the acrylic shelves, being careful not to move the niche's position.
7. Clean the niche, fan header and shelves with clean rags and clean water.

**If you have any questions, please call Mincey Marble Customer Service at 800.533.1806.**